



# Street Pro Slab Saws



**Versatile Saws For  
Demanding Cutters**

**Includes 10" Premium  
Green Concrete Blade**



**The Compact, Lightweight, Multi-Purpose Saw...**  
**Ideal for 'Green Concrete' Control Joint and Decorative Concrete Sawing**

- Cuts Control Joints in Green Concrete
- Cuts Decorative Lines in Cured Concrete
- Center Blade Mount Design for True Straight Line Sawing
- Infinitely Adjustable Locking Depth Control w/Gauge
- Powerful HONDA GX200 Gasoline Engine w/Cyclone Air Filter
- Standard 5/8" Blade Arbor
- Includes 10" Premium Green Concrete Blade
- Front and Rear Tracking Pointer Assemblies
- Compact Design, 106 lbs.



# FCG1-6HA SlabSaver Saw



Powerful Honda GX200 gas engine  
with Cyclone air filtration

Center oriented blade system  
for accurate tracking

Infinitely adjustable blade depth  
control with positive lock

Accurate front and rear  
pointer system



## Features

- Light and portable one-man operation
- 10" blade capacity for a 3 1/4" depth of cut
- Cuts control joints in green concrete and decorative lines in cured concrete
- Ideal for light demolition operations in cured concrete and asphalt
- Center cut -- accurate straight line sawing
- Saws right to the edge of walls and columns
- Rear pointer drops into cut to ensure straight cutting
- Infinitely adjustable PosiLok blade depth control
- Adjustable handle height for operator comfort
- Tough polyurethane wheels equipped with permanently sealed ball bearings -- rides smoothly on all surfaces
- 3/4" blade shaft assembly
- Standard 5/8" blade arbor
- 10 ga. jig-welded steel frame will not flex or bend
- Single premium 3VX belt drive
- Vacuum nozzle hook-up on blade guard

**Includes Premium 10  
PSA Green Concrete  
Diamond Blade**



## Specifications

FCG1-6HA -- Slab Saver with Honda GX200 Gas Engine

### Diamond Blade

Up to 10" diameter with 5/8" round arbor

Also accepts 7" and 8" V-groove (crack chaser) blades

Includes 10PSA

### Engine



5.5HP\* Honda GX200 with Cyclone pre-cleaner air cleaner

### Weight

106 lb. (48 kg)

### Depth of cut

Up to 3. 1/4" maximum with 10" blade

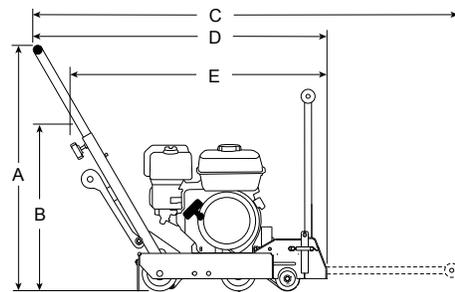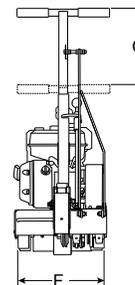

Concrete Saw Dimensions		
REFERENCE LETTER	DESCRIPTION	DIMENSIONS (CM)
A	Max height (Handle Bars Fully Raised)	118.7 CM (46.75 in.)
B	Max Height (Handle Bars Fully Lowered)	81.3 CM (32.0 in.)
C	Max Length (Handle Bars Fully Raised & Front Pointer Lowered)	172.7 CM (68 in.)
D	Max Length (Handle bars Fully Raised & Front Pointer Raised)	121.9 CM (48 in.)
E	Max Length (Handle bars Fully Lowered & Front Pointer Raised)	99 CM (39 in.)
F	Max Overall Width	34.3 CM (13.5 in.)
G	Max Handle Bar Deflection	37.5 CM (14.75 in.)



# SP1 SERIES Saws



Multiquip's Street PRO SP1 Series of walk-behind saws provide trusted durability, simple operating mechanics, and great cutting performance. Whether sawing concrete or asphalt, the reinforced steel box frame adds the strength necessary to reduce vibrations, maintain precise tracking and permitting optimum performance of the diamond blade. Both models provide industrial strength components, rugged design, and minimal maintenance requirements.

## SP118

## Gasoline Model



***The rugged SP1 is economical, compact, and easy to operate.***



# SP1 SERIES Saws



## SP1E16A

## Electric Model

Rugged Reinforced Steel Frame Construction

Solid Cast 230V Switch Box

Standard Water Plumbing Hookup


Powerful Baldor  
230V/19.5A 5HP 1Ø Electric Motor

16" Blade Capacity

Industrial Blade Shaft and  
Bearing Assembly



Optional 5 GAL Water Kit Available For The SP118 (SPIWK)

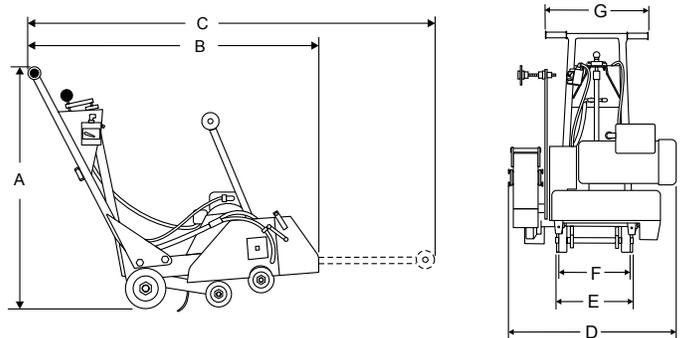

Dimensions		
Reference	Description	Dimensions in. (cm)
A	Height w/Handle	43.0" (109)
B	Length w/Pointer Raised	46.0" (117)
C	Length w/Pointer Lowered	76.0" (170)
D	Height w/o Handle	37.0" (94)
E	Width	25.0" (64)
F	Rear Wheel Base	17.0" (40)
G	Front Wheel Base	10.0" (25.4)
H	Width Handle Bar	24.5" (40)
I	SP118	270 lbs
J	SP1E16A	235 lbs



# SP2 SERIES Saws



## Street Pro SP2

Multiquip's Street PRO SP2 Series of walk-behind saws represent engineered strength, design simplicity and trusted performance. These saws excel at tough jobs that require true, tracking, and fast sawing performance. The Models offer either a GX390 or GX630 HONDA gasoline engine. The GX390 Engine Models are offered in either a 'Push' or Self-Propelled design.



- ■ Fully Adjustable Handle Bar
- ■ 5 Gal. Dust Suppression Water Tank
- ■ Lifting Bar
- ■ Trusted HONDA GX390 11.7 HP Gasoline Engine w/ Cyclone Air Filtration
- ■ Rugged reinforced Box Frame assembly to ensure accurate sawing

20" Blade Capacity ■ —

Rugged Hydrostatic Transmission ■ — supports smooth propulsion and free-wheel convenience



Left/Right Hand Sawing ■ —

Industrial Blade Shaft Assembly ■ —





- ■ Fully adjustable Handle Bar
- ■ 5 Gal. Dust Suppression Water Tank
- ■ Lifting Bar
- ■ Trusted HONDA GX630 20.8 HP Gasoline Engine w/Electric Start
- ■ Rugged Hydrostatic Transmission supports smooth propulsion and free-wheel convenience
- ■ Rugged reinforced Box Frame assembly to ensure accurate sawing
- ■ Left/Right Hand Sawing
- ■ Industrial Blade Shaft Assembly
- ■ 20" Blade Capacity - 7.5" Depth of Cut

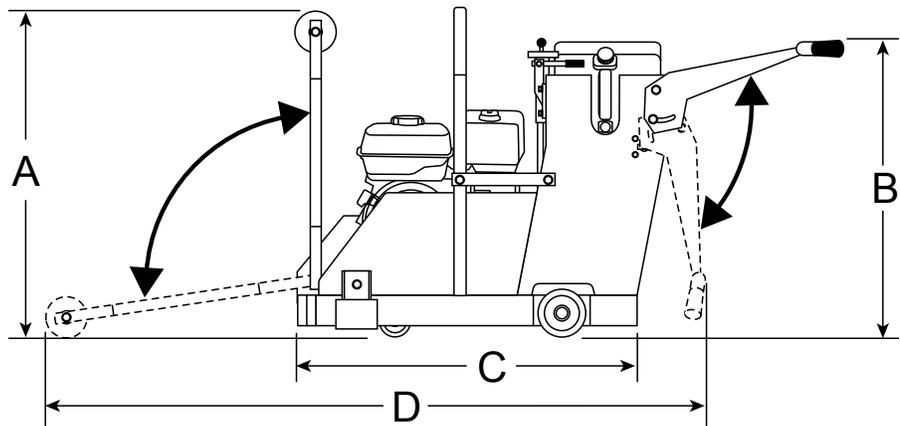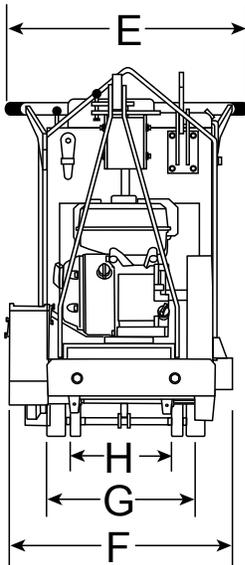

Dimensions		
Reference	Description	Dimensions in. (cm)
A	Height w/Pointer Up	36.0" (91.4)
B	Length w/Handle Up	40.0" (101.6)
C	Length w/Handle/Pointer Up	43.0" (109)
D	Length Handle Up/Pointer Down	37.0" (94)
E	Max Handle Bar Width	24.0" (61)
F	Max Width	24.5" (62.2)
G	Rear Wheel Base	16.0" (40.6)
H	Front Wheel Base	14.0" (35.6)

# Street Pro Slab Saws - Specifications



Model	Power*	Arbor Size in. (mm)	Blade Capacity in. (mm)	Cutting Depth in. (mm)	Front Wheels	Rear Wheels	Weight lbs. (kgs)
<b>Slabsaver Series - Push Model</b>							
FCG1-6HA	HONDA GX200 Gasoline w/Cyclone Air Filtration	5/8" (15.9)	10" (254)	3 1/4" (83)	5" x 1.5"	5" x 1.5"	106 (48)
<b>SP1 Series - Push Model</b>							
SP118	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	18" (457)	6.5" (165)	4" x 2"	8" x 2"	270 (122.7)
SP15E16	BALDOR 5HP 230V 1Ø Electric Motor	1" (25.4)	16" (406)	5.5" (140)	4" x 2"	6" x 2"	235 (106.8)
<b>SP2 Series - Push Model</b>							
SP213H20A	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	20" (508)	7.5" (191)	4" x 2"	8" x 2"	280 (127)
<b>SP2 Series - Self-Propelled Model</b>							
SP2S13H20A	HONDA GX390 Gasoline w/Cyclone Air Filtration	1" (25.4)	20" (508)	7.5" (191)	4" x 2"	8" x 2"	325 (147)
SP2S20H	HONDA GX630 Gasoline / Dual Element Canister Filtration	1" (25.4)	20" (508)	7.5" (191)	4" x 2"	8" x 2"	395 (179)

© COPYRIGHT 2011, MULTQUIP INC.

## Saw Accessories

Model Saw	Accessory Part#	Description	Weight lbs. (kgs)
SP118	SP1WK	5 Gal. Water Tank Kit (Gas Model Only)	25 (11)

## Saw Accessories - Diamond Blades

Model	Arbor Size	Size	Grade	Description	Type
10PSA	5/8"-DM	10" x .095"	Premium	Green Concrete/Asphalt	DRY/WET
14PWBA	1"	14" x .125	Premium Plus	Green Concrete/Asphalt	DRY/WET
16PWBA	1"	16" x .125	Premium Plus	Green Concrete/Asphalt	DRY/WET
18PWBA	1"	18" x .125	Premium Plus	Green Concrete/Asphalt	DRY/WET
20PWBA	1"	20" x .125	Premium Plus	Green Concrete/Asphalt	DRY/WET
10PSG	5/8"-DM	10" x .095"	Premium Plus	Cured Concrete	DRY/WET
14PWBC	1"	14" x .125	Premium Plus	Cured Concrete	DRY/WET
16PWBC	1"	16" x .125	Premium Plus	Cured Concrete	DRY/WET
18PWBC	1"	18" x .125	Premium Plus	Cured Concrete	DRY/WET
20PWBC	1"	20" x .125	Premium Plus	Cured Concrete	DRY/WET

\* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

All features and specifications are subject to change without notice.  
Version (12-11\_BD)

Connect with us on



**MULTIQUIP INC.**  
POST OFFICE BOX 6254  
CARSON, CA 90749  
310-537-3700 • 800-421-1244  
FAX: 310-537-3927  
E-MAIL: mq@multiquip.com  
www.multiquip.com